

# FREESTANDING

**ARDOR**

**6 & 8 KW SINGLE SIDED**



**infiniti fires**

A NEW GENERATION IN HEATING

INFINITI 8 KW ARDOR WITH WOOD BOX



INFINITI 8 KW ARDOR C/W TAPERED LEGS



Our newly launched Ardor model wood stoves have been designed to provide a slim but powerful freestanding wood stove. Like its bigger brothers it has:

- A convection box around the internal combustion chamber, to maximise movement of hot air out into the room and lower the temperature of the external steel walls. Keeping these safer when accidentally touched.

- A full vermiculite jacket inside the stove to increase the combustion temperature. This increases both the efficiency of the stove and the ability of the stove to move more heat out through the window of the stove as a light wave. Great at heating big areas quickly.
- Long slow burn times. Once the fire is burning well with a full load of wood, the dual Air Controls can be closed about 90%, allowing the fire to burn slowly for hours and keep your room warm.

## HEATING CAPACITY

**6 Kw** ▶ 240 m<sup>3</sup> | **8 Kw** ▶ 320 m<sup>3</sup>

Available in 3 versions: Slimline Legs | Tapered Legs | Wood Box

## ADDED SAFETY FEATURE

## OPTIONAL BOLT-ON FIRESCREEN

On any wood stove the hottest external part of the fire is the glass. Protect your loved ones from harm with our Ardor wood stove units.

The optional firescreen can be easily added to the door to prevent contact with the hot glass, making it safer for homes with young children or pets. And when the screen is no longer needed, it can be just as easily removed. Enjoy peace of mind without sacrificing style with Ardor.



# FREESTANDING

**ARDOR**

**6 & 8 KW SINGLE SIDED**



A NEW GENERATION IN HEATING





INFINITI 6 KW ARDOR WITH SLIMLINE LEGS

	a	b	c	d
6 KW WOOD STORAGE	468	434	1003	848
6 KW TAPERED LEG	468	434	868	713
6 KW NARROW LEG	468	434	868	713
8 KW WOOD STORAGE	588	554	1003	755
8 KW TAPERED LEG	588	554	868	708
8 KW NARROW LEG	588	554	868	708

**HEATING CAPACITY**

6 Kw ▶ 240 m<sup>3</sup> | 8 Kw ▶ 320 m<sup>3</sup>

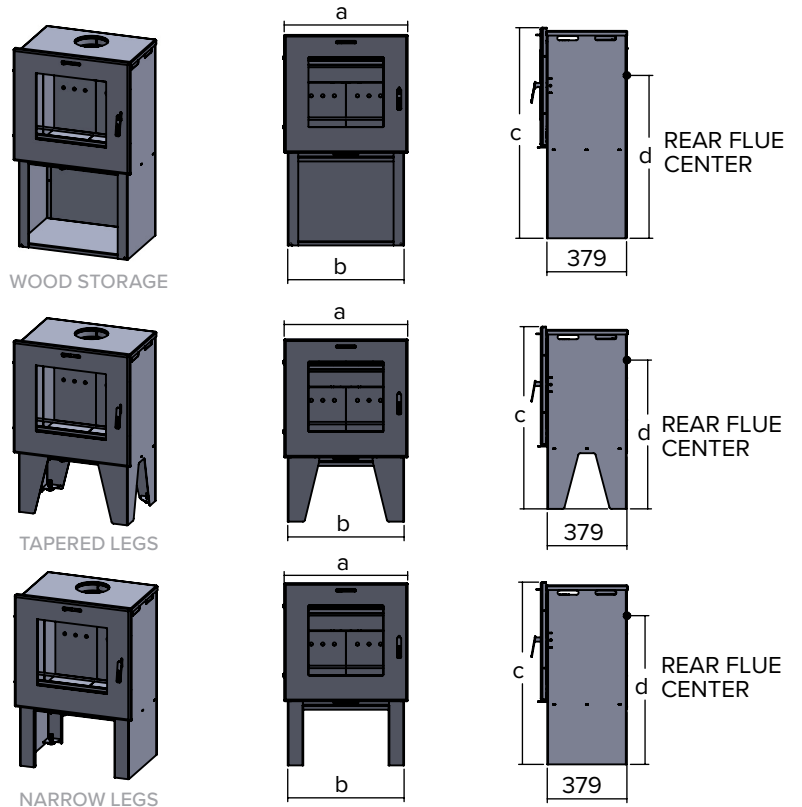

6 KW | ARDOR | FREESTANDING | CONVECTION | DUAL AIR CONTROLS | 125 MM DIAMETER FLUE | TOP OR REAR EXIT

8 KW | ARDOR | FREESTANDING | CONVECTION | DUAL AIR CONTROLS | 150 MM DIAMETER FLUE | TOP OR REAR EXIT